

Fig. 1

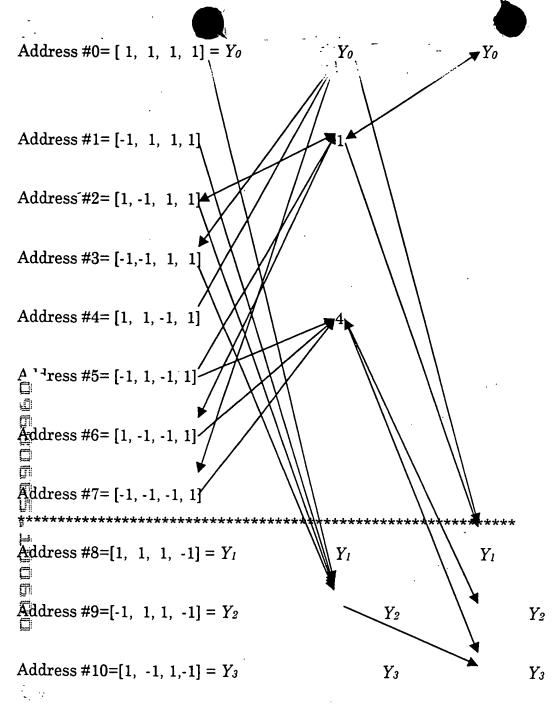


Fig. 2

Example 3: U₁-Matrix

The following sequence of steps describes an implementation of the GEM method in the case where the entries of the transformation matrix belong to the set U_I

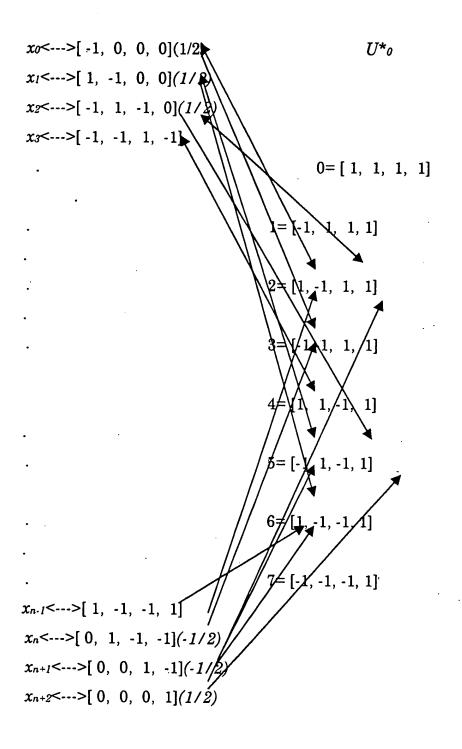

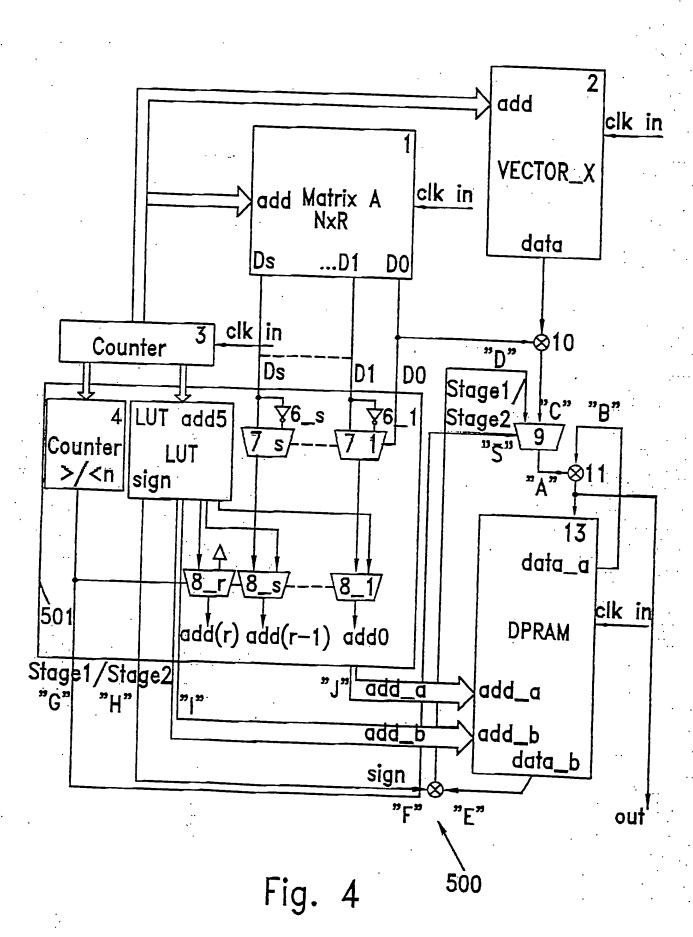


Fig. 3









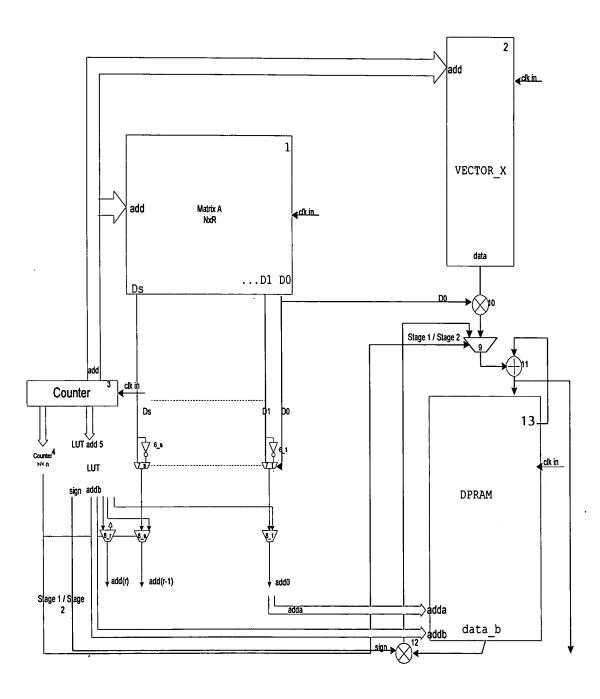


Figure 5